


Riverville

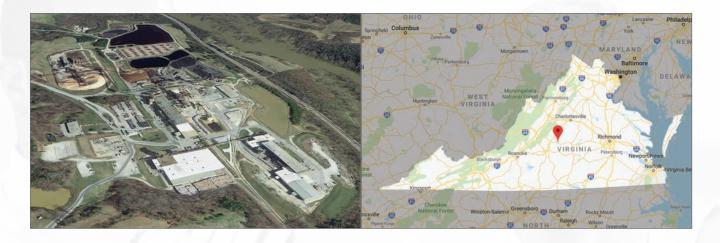

Location: Gladstone, VA

Trim

Machine #1: 182" Machine #2: 260"

Splices: Maximum of 2 splices per roll

- ✓ No splice within 6" of the core
- ✓ No splice within 2" of each other
- ✓ No splice within 3/4" of outside diameter

Roll Number:

Roll Number will be written on one end of each roll within 12" of the core

Certifications:

✓ FSC[®], SFI[®] and PEFC[®] Chain of Custody Standard for Recycled Paper

Product Offerings:

- ✓ Machine #1 Semichemical Medium and Wet Strength Medium
- ✓ Machine #2 Recycled Linerboard

Rolls:

	Caliper Range	Min. Trim	Max. Trim
Machine #1			
	.009 –.0115	160"	182"
Machine #2			
(Lightweights 23# - 26#)	.009 –.0135	250"	258"
(Heavyweights 30# - 40#)		250"	260"

✓ 58" diameters

✓ Roll Cores: 4"

Medium Grades

Run to Ring Crus Concora Density (ft ² *inch)	h/ Calipers	Basis Wt.		
Standard Semichemical Medium				
2.6 - 3.0	.00880135	23# - 40#		
Wet Strength Me	dium			
2.6 - 3.1	.00880136	23#-40		

Linerboard

Run to Ring Crush Density (ft ² *inch)	Calipers	Basis Wt.
3.3 - 3.7	.009 – .0115	30# - 42#

For more information: 1-800-933-4115



Data, dimensions, and information provided on this document are considered as nominal values for general purpose use in evaluating this product for customer's application. These are not considered as manufacturing specifications. WE HEREBY DISCLAIM AND EXCLUDE ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

© 2019 Greif, Inc. All rights reserved. Greif is a registered trademark.