

# SentryGuard™


## Vertical Lift Cantilevered Gate

### Meets OSHA Requirements

1926.502(b)(3) and (b)(4) & 1910.29(b)(3) and (b)(4)

#### Features:

- Easy to open vertical gate to protect dock or pit loading areas
- Split opening cantilever style accommodates wider openings & lower ceiling heights
- One foot increments standard, custom sizes available
- Operation assisted by gas struts for easy lifting
- Split gates lock together at the center in the closed position for added strength

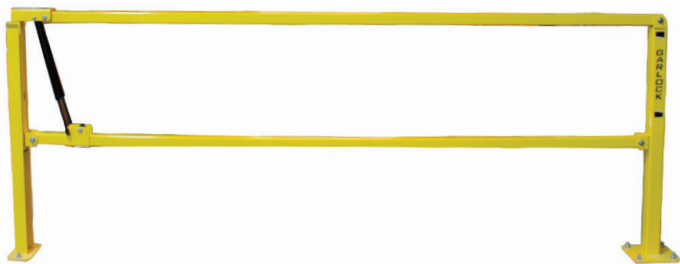

**Single opening gates for openings 3 ft. to 10 ft. wide**



**Split opening gates for openings 6 ft. to 14ft. wide**

#### Enhanced Safety:

Easy operation and OSHA compliant SentryGuard gate is the fall prevention gate of choice for shipping and receiving dock doors and shipping pits in busy material handling applications. Once the semi-truck is backed up to the dock door or recessed shipping pit, the gate can be lifted as now the fall hazard is eliminated by the truck.

#### Optimize Workspace Efficiency:

The depth of the gate is very small and consumes very little of the valuable floor space needed for receiving incoming goods or shipping products to customers. Compared to a swing gate; which requires large open areas to swing the gate open, the SentryGuard cantilevered gates open upward allowing you to take full advantage of the often limited workspace in shipping and receiving areas.

#### Versatile Applications:

Single SentryGuard gates have a clear opening for 3' to 10' so they can be used for much more than dock doors. Fall prevention around floor holes where large materials need to pass through, pedestrian access and control, and separating people from machinery are other popular applications.

Split SentryGuard gates are used when the clear opening required is up to 14' and also where height restrictions prohibit the use of a single SentryGuard gate.

#### Why Choose Garlock?

- Rigorously Tested to Exceed OSHA & ANSI Standards
- In-House Engineering
- 100+ Years of Industry Experience
- Full Passive Fall Prevention Portfolio
- Custom Engineered Products Available

## Features



Concrete anchors and all hardware included




Low ceiling height requirements



Dual gas struts for near effortless lifting



Split gate for very wide openings or low ceiling height

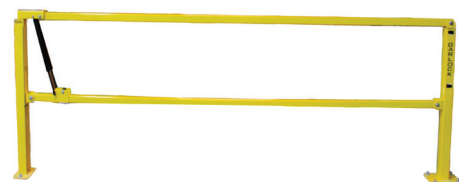

Heavy duty steel and powder coated for long life



Optional lock for access control

## Specifications

Single gate clear opening sizes	3' to 10', one foot increments standard
Split gate clear opening sizes	6' to 14', one foot increments standard
Rails	1.75 square tubing, 0.083" wall thickness
Hinge post	2.5" square tubing, 0.25" wall thickness
Latch post	10 gauge steel
Mounting depth	8"

Due to continuous improvement, specifications are subject to change without notice.

## Gate Options

428-037-001	6' single gate kit, for use with 6' door openings, safety yellow
428-061-001	8' single gate kit, for use with 8' door openings, safety yellow
428-085-001	10' single gate kit, for use with 10' door openings, safety yellow
428-537-001	12' split gate kit, for use with 12' door openings, safety yellow



©2023 Garlock Safety System, All rights reserved.

P : 877.791.4446  
E : [safetyorders@garlockequip.com](mailto:safetyorders@garlockequip.com)  
GARLOCKSAFETY.COM

Address:  
2601 Niagara Ln N.  
Plymouth, MN 55447

161798  
07-2023