

Perimeter Clamp System

Meets OSHA Requirements

1926.502(b)



OSHA compliant leading edge fall protection system that can be used on both flat edge surfaces and parapet walls.

Improved Productivity:

Perimeter systems save labor and improve efficiency over visual warning lines because, after setup, you can safely work all the way to the edge of the roof or deck structure without being tied off. Studies prove that workers are 50% more productive when not being restrained.

Quick Setup:

The perimeter clamp is easily set up by one person with no tools required. The ergonomically designed tensioning handle allows fast and secure tightening of the clamp on any parapet from 8" to 24" wide. The perimeter clamp accommodates both flat edge and parapet wall construction.

Rugged Construction:

The perimeter clamp is zinc plated and the stanchion is powder coated to resist the elements and provide long life. All components are made in the USA, built to work and tested to meet the latest OSHA requirements.

Stronger Design:

Everything about the perimeter clamp is stronger. From the larger pads that provide more surface contact to the 1.25" tubing versus competitive 1" tubing. The large tensioning handle allows better clamping force and is rubber coated to last.




Why Choose Garlock Safety Systems™?

- Rigorously Tested to Exceed OSHA & ANSI Standards
- In-House Engineering
- Full Passive Fall Prevention Portfolio
- Custom Engineered Products Available






Typically the Perimeter clamp is clamped onto the vertical edge of a parapet wall. The stanchion is height adjustable to ensure the OSHA compliancy. Job site provided 2X4 lumber is used for the safety railing.

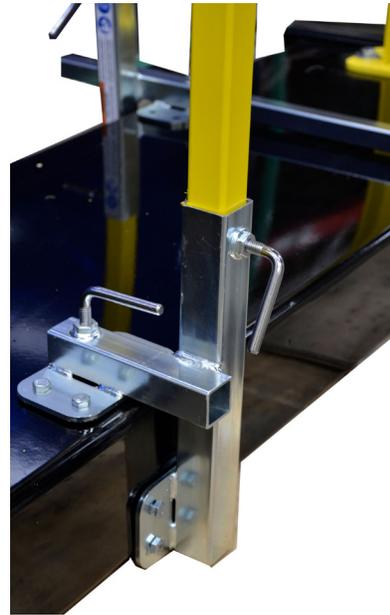

The perimeter clamp can be disassembled and mounted using four or eight 5/16" lag bolts driven into to a wood cap rather than the screw clamp method. This ensures no clamp protrusion into the roof top work zone which may inhibit certain types or work.

Features

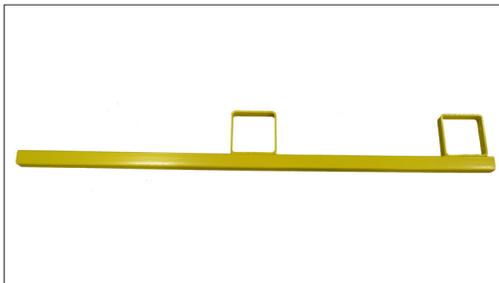

42" stanchion



Tool Free Perimeter Clamp

Specifications

Stanchions	42"
Spacing	Recommended 6 ft. max. 8ft.
System Includes	1 clamp, 1 stanchion
Perimeter Clamp	Adjustable from 8" - 24"
Weight (lbs.)	14

Garlock Safety Systems does not provide the 2X4 wood used for rail and therefore cannot attest to suitability or set thereof for this application.



P : 877.791.4446
 E : safetyorders@garlockequip.com
GARLOCKSAFETY.COM

Address:
 2601 Niagara Ln N.
 Plymouth, MN 55447