

VersaGate™

Self-Closing Gate System

Meets OSHA Requirements

1910.29(b) and 1926.502(b)

OSHA compliant gate that protects workers from stairway and ladder falls. Two-piece gate for adjustability with two adjustable sizes for openings between 48"-54" and 54"-60". For smaller openings see the Easy-Fit family of self-closing gates. Spring loaded hinge provides self-closing gate feature.

Features

For areas that require access but should be normally closed, use of a self-closing swing gate is recommended. Two standard adjustable models are available, depending on your opening size. Custom sizes, colors and galvanized options make the VersaGate the versatile solution.

- Protects workers from entry/exit falls
- Two-piece gate for adjustability to fit varying widths
- Two standard models and universal left/right mounting
- Spring-loaded hinge provides self-closing feature
- Adjustable Hinge height for universal mounting
- Universal clamp will fit flat or round post or rail

Multiple color options available
Visit www.ralcolor.com for color choices



Shown with HatchProtector™

Why Choose Garlock Safety Systems™?

- Rigorously Tested to Exceed OSHA & ANSI Standards
- In-House Engineering
- Full Passive Fall Prevention Portfolio
- Custom Engineered Products Available




Features



Universal Clamp Mount



Adjustable Stop

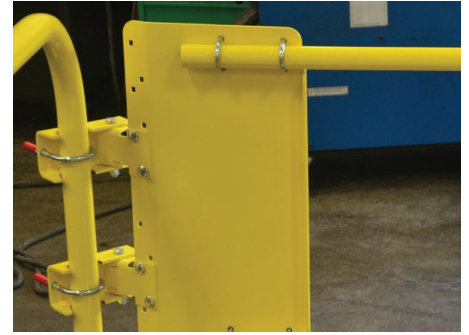

Adjustable Gate Width

Specifications

Closing Method: Spring Loaded

- Adjustable Model Widths:
- 48" to 54"
- 54" to 60"

Mount to square or round post.

Adjustable hinge height.

Universal mount to different diameter railings or posts.



P : 877.791.4446

E : safetyorders@garlockequip.com

GARLOCKSAFETY.COM

Address:

2601 Niagara Ln N.

Plymouth, MN 55447