

# ScreenGuard™

## Skylight Protection System


### Meets OSHA Requirements

1926.501(b) (4) CAL OSHA 3212(b) and (e)


Easy Mounting, OSHA compliant solution to limit your liability and protect your employees. New simplified compression fit design means no mechanical fasteners penetrate either the roof or the skylight maintaining water integrity of the roof. Galvanized for resistance to the elements.

### Features and Benefits:

- Affordable protection.
- Withstands up to 450 pounds of dynamic force.
- Standard and custom sizes available.
- Compression fit to the skylight frame to maintain watertight integrity. Does not contact the roof.
- Galvanized to resist corrosion.

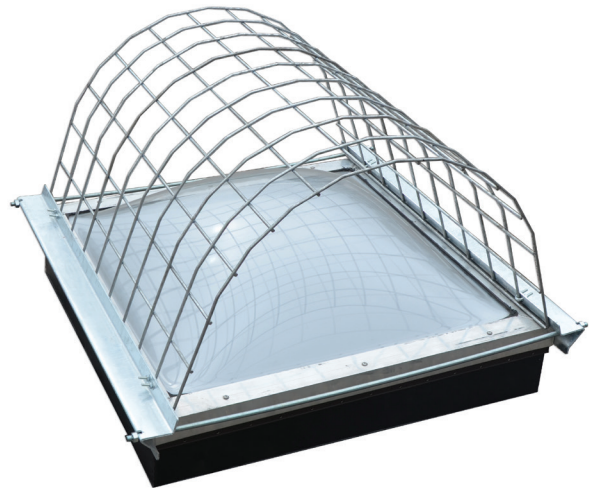

**Rugged Compression  
Fit Design**

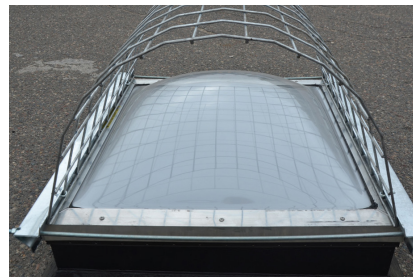

**Ample Skylight  
Dome Clearance**

## Why Choose Garlock Safety Systems™?

- Rigorously Tested to Exceed OSHA & ANSI Standards
- In-House Engineering
- Full Passive Fall Prevention Portfolio
- Custom Engineered Products Available



# Specifications

Maximum skylight frame width: 48"

## Load Ratings

2' x 2' .....500 lbs.

2' x 3' .....500 lbs.

3' x 3' .....500 lbs.

3' x 4' .....500 lbs.

4' x 4' .....500 lbs.

4' x 5' .....500 lbs.


4' x 6' .....500 lbs.

4' x 7' .....500 lbs.

4' x 8' .....440 lbs.

Standard Sizes	A	B	C
2424	7	24	24
2828	8	28	28
2852	8	28	52
3636	10	36	36
3652	10	36	52
3676	10	36	76
4242	12	42	42
4280	12	42	80
5252	14	52	52
5276	14	52	76
5296	14	52	96

## Skylight Protection Configurator

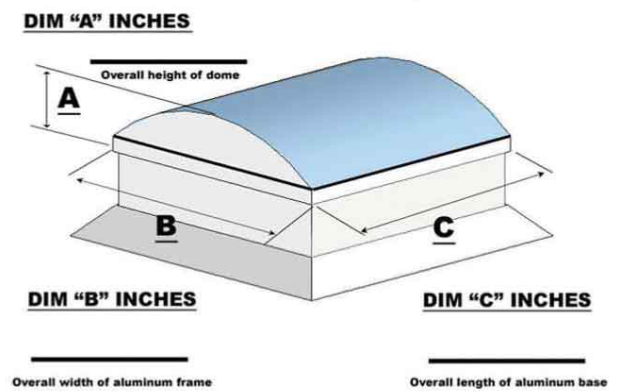

P : 877.791.4446  
E : safetyorders@garlockequip.com  
GARLOCKSAFETY.COM

Address:  
2601 Niagara Ln N.  
Plymouth, MN 55447