



CONSTRUCTION PRODUCTS

EasyPour™ ProPlus™

Concrete Forming Tubes

These high performance forming tubes are manufactured for tough jobs and tough jobsites. They can easily withstand 72 hours of precipitation.

Continuous length up to 28 feet.



PACKAGING SUCCESS TOGETHER

www.greif.com

For Jobs that Require an Industrial Strength Concrete Forming Tube

Engineered to perform in the most challenging job sites

FEATURES:

- ✓ **Extended water resistance (Minimum 72 hours)**
Proprietary moisture resistant adhesive and specially formulated top ply combination provides far greater moisture resistance than standard tubes.
- ✓ **Continuous length up to 28 feet**
- ✓ **Greater burst strength and tear resistance**
Engineered to hold the full hydro-static pressure of a continuous pour for tubes up to 28 feet.* Do not exceed ACI pour rate recommendations.
- ✓ **Convenience**
One-time use tubes allow faster setup for multiple column pours with no cleaning, reassembling or return shipping.
- ✓ **Installation**
Avoid damaging inside portion of tube when installing. Bracing: Make sure form is plumb. Brace accordingly to best industry standards.
- ✓ **Lighter weight**
Easier to handle and install
- ✓ **Popular Sizes Available**
Available in 12" – 60" diameters
- ✓ **Form Stripping Instructions**
Strip the form as soon as possible after concrete sets to prevent concrete from sticking to the form. Ideal time for form removal is 24 to 48 hours after the pour.

*Pouring rate based on tube size and specific job site conditions




Made from
recycled paperboard



Greif® Construction Tube Locations

Arlington, TX	Denver, CO	Mississauga, ON	Van Wert, OH
Bay Minette, AL	Kernersville, NC	Phoenix, AZ	Winnipeg, MB
Chicopee, MA	Longview, WA	Salt Lake City, UT	York, PA

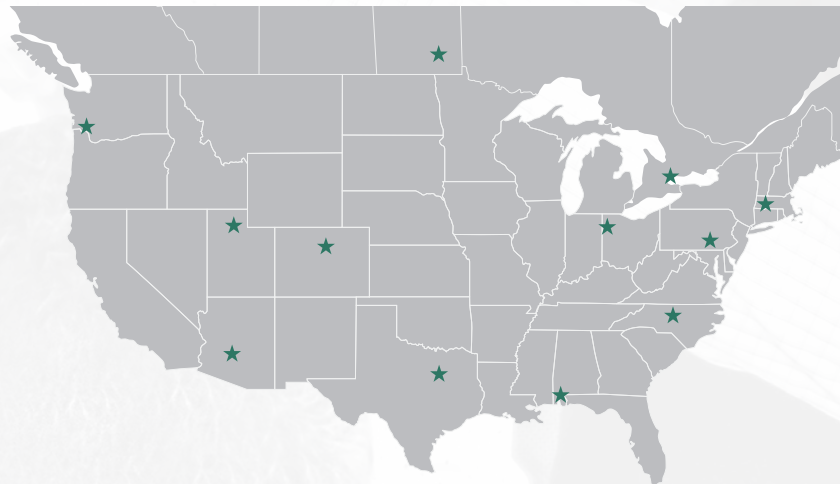

📍 For more information: 1-888-462-9377 constructionproducts@greif.com



Data, dimensions, and information provided on this document are considered as nominal values for general purpose use in evaluating this product for customer's application. These are not considered as manufacturing specifications. WE HEREBY DISCLAIM AND EXCLUDE ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

© 2023 Greif, Inc. All rights reserved. Greif, EasyPour and Weather Shield are registered trademarks.